


Model RFD


SEAL STRENGTH TESTER for RIGID and FLEXIBLE PACKAGES

Complies with ASTM test method F88

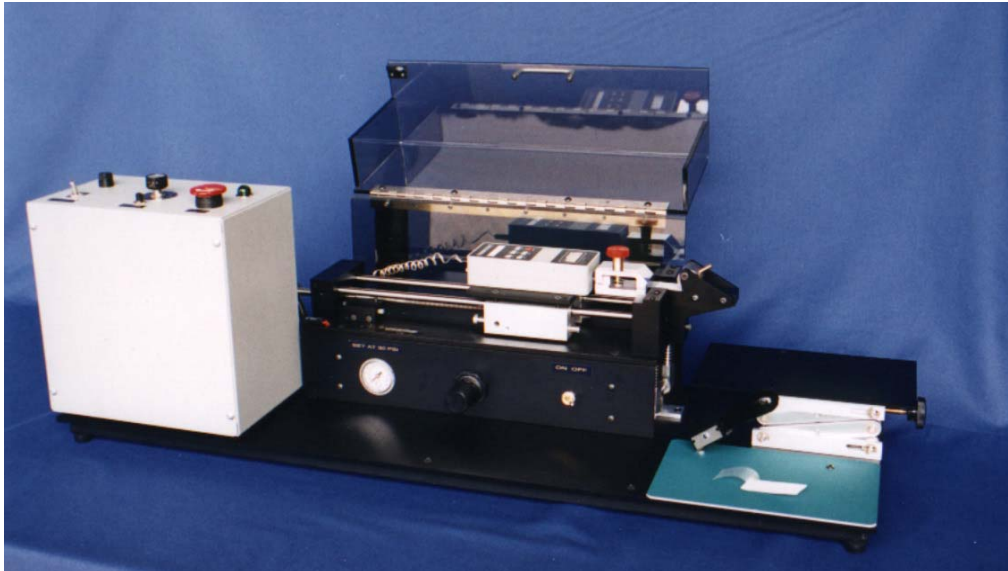

Specifications:

- Pneumatic tray clamp improves testing speed.
- Mobile grip assembly returns automatically to start position.
- Sliding block with low friction precision linear bearings is supported by hardened steel shafts.
- User can test any tray with sides over 1 ¼" and up to 3 ½" depth.
- Digital force gauge can be easily removed for calibration.
- RS-232 Data output
- 4 " peel travel
- Variable speed 1 to 12 inches per minute (preset at 12 ipm).
- Dimensions: 37.5"L x 12"W x 13"H
- Instrument weight: 50 pounds
- Required utilities are 120 VAC and 80 PSI compressed air

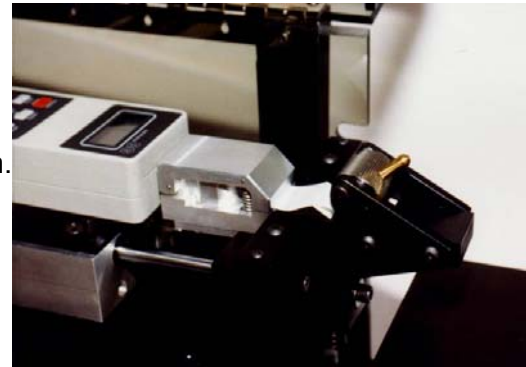

Application:

- Rigid thermoformed trays
- Cups (holding fixture required)
- Flexible packages (pouches)
- Other containers

Standard Features

- Variable speed drive
- Tray universal sample cutter
- Sample cutter for flexible materials
- Mark-10 Digital force gauge series BG

Price List

Instrument Price: \$ 11,250
TestWise Data Collection Software \$ 875

Data Cable (required for data transmission) \$ 75
Estimated crating, freight and insurance \$ 385
(Domestic destination - FedEx 2nd day)

Leasing Monthly Rates*

Please call

*Actual monthly rate reflects base model and may vary depending on prime rate and options.